

Boring Bar 90° Holder

Side-lock holder for Ø16 mm boring bars — perpendicular mounting for low-clearance turrets

D16 SERIES

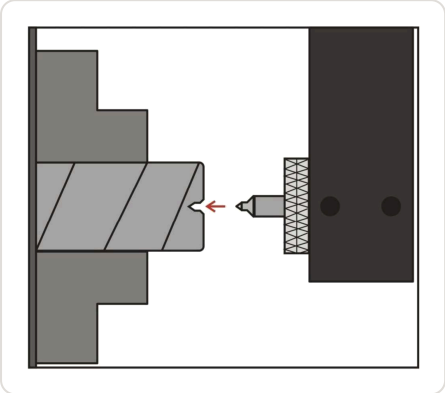

Bar clamped by the side-lock screw

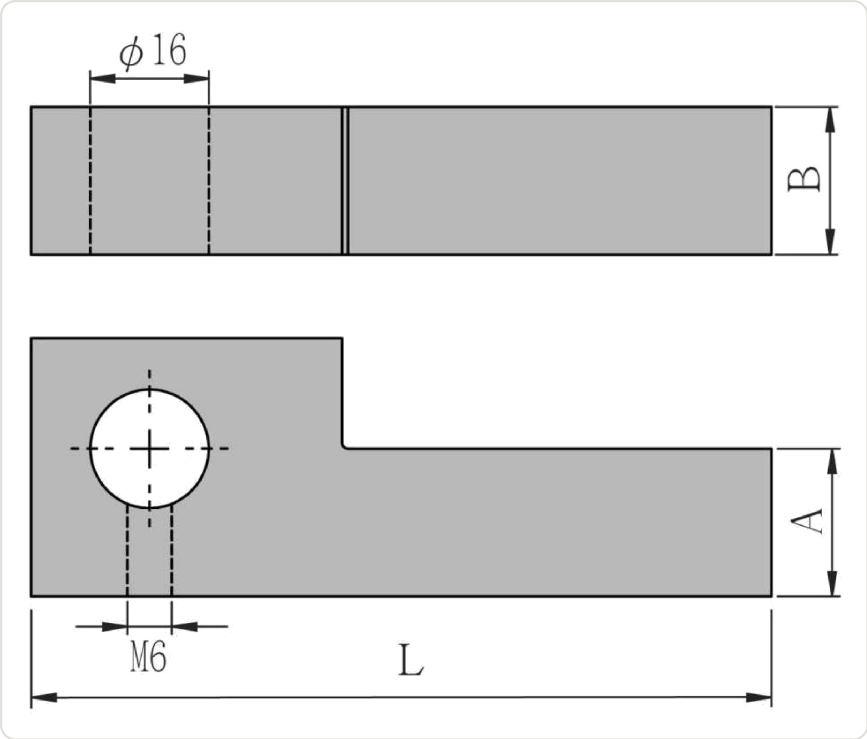

Principal dimensions (mm)

Features

- **Direct side-lock clamping.** An M6 set screw holds the Ø16 mm bar against the seat — no collet or sleeve required.
- **90° mounting.** The bar sits perpendicular to the shank, freeing vertical clearance on crowded turrets.
- **Two shank sizes.** 20×20 and 25×25 mm square shanks to suit common turret pockets.
- **Supplied complete.** Clamping screw and hex wrench are included with every holder.

Dimensions

Model No.	Dimensions (mm)				Clamping screw	Wrench
	A	B	F	L		
D16-2020K	20	20	16	125	ASC9-6008	AWLH030
D16-2525M	25	25	16	150	ASC9-6008	AWLH030

Unit: mm

Standard configuration — each holder ships with one ASC9-6008 clamping screw and one AWLH030 hex wrench. Bore F is Ø16 mm on both sizes. Non-standard shank dimensions and bore sizes available on request.