
Boring Bar Sleeve — Ø16

Flanged Ø16 mm sleeves with flatted seat — bores Ø4 to Ø12 mm

ASH SERIES

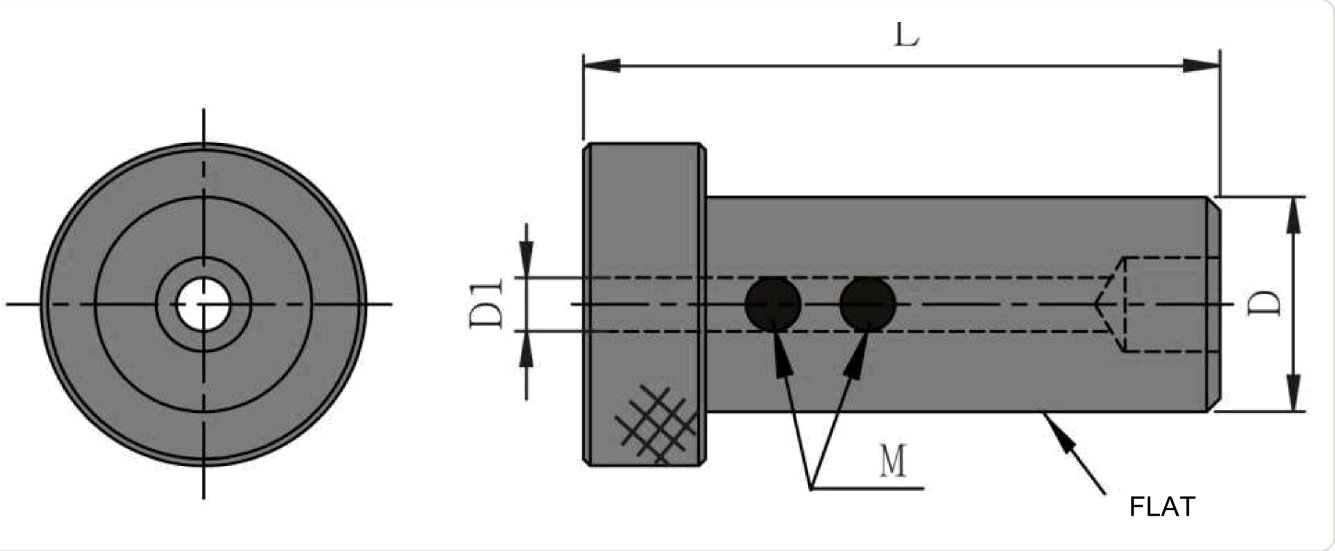

End view and side view with the two clamping screws and the flat

Features

- **One holder size, eight bores.** A single Ø16 mm holder bore covers bars from Ø4 to Ø12 mm.
- **Flatted seat.** The ground flat resists rotation and pull-out under load.
- **Twin clamping screws.** Two screws spread the clamping load along the bar seat.
- **Screw and wrench listed.** Matching ASC9 screw and AWLH wrench are given for every size.

Dimensions

Model No.	D	D1	H	L	Clamping screw	Wrench
ASH-0416-31	16	4	15	31	ASC9-4004	AWLH020
ASH-0516-31	16	5	15	31	ASC9-5004	AWLH025
ASH-0616-31	16	6	15	31	ASC9-6004	AWLH030
ASH-0716-31	16	7	15	31	ASC9-5004	AWLH025
ASH-07716-31	16	7.7	15	31	ASC9-5004	AWLH025
ASH-0816-33	16	8	15	33	ASC9-6004	AWLH030
ASH-1016-33	16	10	15	33	ASC9-6004	AWLH030
ASH-1216-33	16	12	15	33	ASC9-6004	AWLH030

Unit: mm

Standard configuration — each sleeve is supplied with the clamping screw and wrench listed in its row. Bore tolerance and non-standard bores available on request.